| Product Image | Product Name | Part Number | Description | Weight (Kg) | Environment |
|-----------------|--|-------------|--|-------------|-------------|
| QolorFLEX Conne | ect 10: | | | | |
| | QolorFLEX Connect 10 | 5748 | City Theatrical's QolorFLEX Connect 10 is a practical and time saving solution for managing the multiple wire runs and numerous connections needed for large scale installations of LED Tape in entertainment and architectural projects. Developed to complement QolorFLEX 5-in-1 LED Tape, QolorFLEX Connect 10 is a "plug-in box" that can connect up to nine runs of five, four, three, dual, or single color LED tape to a low voltage dimmer. Each QolorFLEX Connect 10 uses 10 six position detachable 6611 Phoenix terminal block connectors to achieve a quick and well-ordered installation. |) | Indoor |
| QolorFLEX LED D | himmer Accessories: | | | | |
| | Mounting Plate For 5943 | 5954 | The Mounting Plate for 5943 QolorFLEX 5x2.5A 2.4GHz Multiverse Dimmers (P/N 5954) supports QolorFLEX 5x2.5A 2.4GHz Multiverse Dimmer installations for smooth dimming control of LED Tape. | | Indoor |
| | Antenna,Omni, 900Mhz/2.4Ghz, 1.8Dbi/3.8Dbi Stubby, Dual Band | 5984 | The Antenna,Omni, 900Mhz/2.4Ghz, 1.8Dbi/3.8Dbi Stubby, Dual Band (P/N 5984) is the standard antenn for City Theatrical's Multiverse® Studio Receiver products and can be used for QolorFLEX Multiverse Dimmers. It brings the advanced features of the Multiverse wireless DMX/RDM system to the dimming control methods for the film and video world. Its connection is made using a RP-SMA male plug. It allows the user to receive a single universe on the 2.4GHz (for worldwide use). | a | Indoor |
| | XLR5M And XLR5F To Three Position Phoenix Connector Female, 6" | 5950 | The XLR5M And XLR5F To Three Position Phoenix Connector Female, 6-inch (P/N 5950) is a QolorFLEX Dimmer Accessory that supports QolorFLEX Dimmer installations for smooth dimming control of LED Tape. | | Indoor |
| | Terminal Block Connector, Six Pin, Female, For 5943 | 5951 | The Terminal Block Connector, Six Pin, Female (P/N 5951) is designed for use with QolorFLEX 5x2.5A 2.4GHz Multiverse Dimmers (P/N 5943). This and other QolorFLEX Dimmers Accessories support QolorFLEX Dimmer installations for smooth dimming control of LED Tape. | | Indoor |
| | Terminal Block Connector, Three Pin, Female For 5943 | 5952 | The Terminal Block Connector, Three Pin, Female (P/N 5952) is designed for use with QolorFLEX 5x2.5A 2.4GHz Multiverse Dimmers (P/N 5943). This and other QolorFLEX Dimmers Accessories support QolorFLEX Dimmer installations for smooth dimming control of LED Tape. | | Indoor |
| | Terminal Block Connector, Two Pin, Female For 5943 | 5668 | Terminal Block Connector, Two Pin, Female (P/N 5668) is designed for use with QolorFLEX 5x2.5A 2.4GHz Multiverse Dimmers (P/N 5943). This and other QolorFLEX Dimmers Accessories support QolorFLEX Dimmer installations for smooth dimming control of LED Tape. | | Indoor |

| | D4 HP 0-10V Connector | 5669 | The 4-pin HP 0-10V Terminal Block Connector (P/N 5669) provides a 0-10V output connection on QolorFLEX Dimmers. | Indoor |
|-----------------|---|---------|--|---------|
| • | XLR3M To XLR5F Adaptor | 6621 | The XLR3M to XLR5F Adapter (P/N 6621) is a QolorFLEX Dimmer Accessory that supports QolorFLEX Dimmer installations for smooth dimming control of LED Tape. | Indoor |
| | XLR3F To XLR5M Adaptor | 6622 | The XLR3F To XLR5M Adaptor (P/N 6622) is a QolorFLEX Dimmer Accessory that supports QolorFLEX Dimmer installations for smooth dimming control of LED Tape. | Indoor |
| QolorFLEX NuNeo | on Accessories: | | | |
| | QolorFLEX NuNeon® End Cap With Strain Relief, Pack Of 10 Pc | N914-01 | QolorFLEX NuNeon® End Cap With Strain Relief, Pack Of 10 (P/N N914-01) are ten packs of end caps that support QolorFLEX NuNeon installations for indoor or outdoor projects. | Outdoor |
| | QolorFLEX NuNeon® End Cap, Pack Of 10 Pc | N914-02 | QolorFLEX NuNeon® End Cap, Pack Of 10 (P/N N914-02) are ten packs of end caps that support QolorFLEX NuNeon installations for indoor or outdoor projects. | Outdoor |
| | QolorFLEX NuNeon® Lead Wire, Two Wire, 40cm | N914-03 | QolorFLEX NuNeon® Lead Wire, Two Wire, 40cm (P/N N914-03) is wire supports QolorFLEX NuNeon installations for indoor or outdoor projects. | Outdoor |
| | QolorFLEX NuNeon® Lead Wire, Four Wire, 40cm | N914-04 | QolorFLEX NuNeon® Lead Wire, Four Wire, 40cm (P/N N914-04) is wire that supports QolorFLEX NuNeon installations for indoor or outdoor projects. | Outdoor |
| | | | | |


installations for indoor or outdoor projects.

N914-05

QolorFLEX NuNeon® Aluminum Extrusion, 2M


QolorFLEX NuNeon® Aluminum Extrusion, 2M (P/N N914-05) is an extrusion that fits QolorFLEX NuNeon

Outdoor

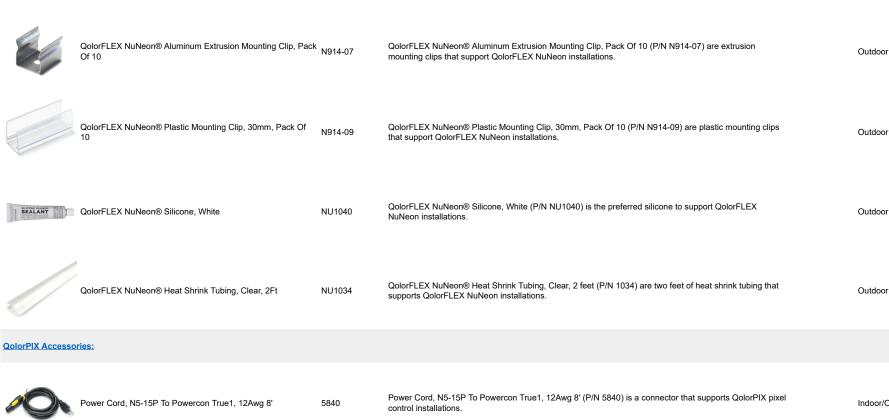

| Power Cord, N5-15P To Powercon True1, 12Awg 8' | 5840 | Power Cord, N5-15P To Powercon True1, 12Awg 8' (P/N 5840) is a connector that supports QolorPIX pixel control installations. | Indoor/Outdoor |
|--|------|--|----------------|
| 2DBi Omni Antenna, Indoor 2.3" | 5729 | The 2dBi Indoor Omni Antenna, 2.3" (P/N 5729) is the standard antenna for City Theatrical's Multiverse® SHoW Baby® and QolorPIX® Tape Controller, Eight Output. The connection is made using a RP-SMA male plug. This omni antenna allows the user to receive or broadcast Multiverse wireless DMX/RDM on the 2.4GHz radio band (for worldwide use). | Indoor |
| Four Pin XIrm With Three Conductor 6" Tail | 5891 | Four Pin XIrm With Three Conductor 6" Tail (P/N 5891) is a conductor tail that supports QolorPIX pixel control installations. | Indoor/Outdoor |

| Aluminum Extrusion, 21mm X 9mm (12mm Inside) | 6691 | Aluminum Extrusion, 21mm X 9mm (12mm Inside) (P/N 6691) is an 12mm extrusion that supports QolorPIX pixel control installations. | Indoor/Outdoor |
|--|------|--|----------------|
| Diffuser For 6691 Extrusion | 6696 | Diffuser For 6691 Extrusion (P/N 6696) is a diffuser that supports QolorPIX pixel control installations within a 12mm extrusion. | Indoor/Outdoor |
| Aluminum Extrusion, 21mm X 14mm (16mm Inside) | 6692 | Aluminum Extrusion, 21mm X 14mm (16mm Inside) (P/N 6692) is an 16mm extrusion that supports QolorPIX pixel control installations. | Indoor/Outdoor |
| Diffuser For 6692 Extrusion | 6697 | Diffuser For 6692 Extrusion (P/N 6697) is a diffuser that supports QolorPIX pixel control installations within a 16mm extrusion. | Indoor/Outdoor |
| Mounting Clip Kit With Screws (For One Roll Of Tape) | 6670 | Mounting Clip Kit With Screws (For One Roll Of Tape) (P/N 6670) is a mounting clip kit that supports QolorPIX pixel control installations. | Indoor/Outdoor |
| QolorPIX® Rack Mount/Pipe Mount Ears | 5870 | QolorPIX® Rack Mount/Pipe Mount Ears (P/N 5870) are mount ears that support QolorPIX pixel control installations. | Indoor/Outdoor |
| QolorFLEX LED Tape Accessories: Barrel Connectors: | | | |
| Barrel Connector, Female | 6615 | The Barrel Connector, Female (P/N 6615) is the female component used to make two-conductor plug-in cable assemblies. | Indoor |

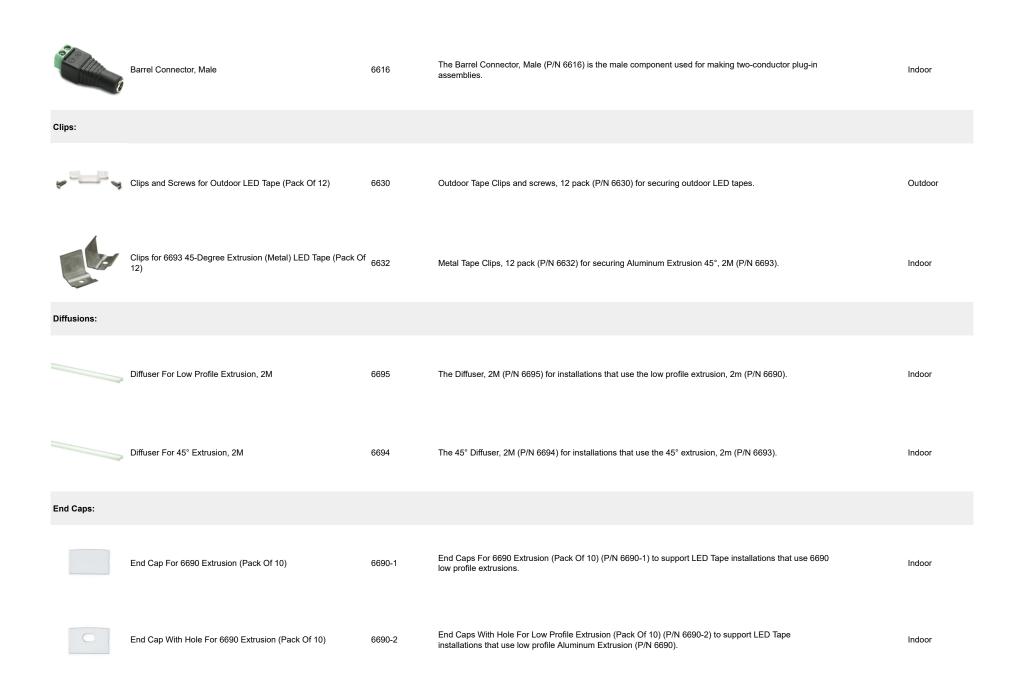

| End Cap For 6693 45Deg Extrusion (Pack Of 10) | 6671-1 | End Caps For 45 Degree Extrusion (Pack Of 10) (P/N 6671-1) to support LED Tape installations that use 6693 forty-five degree angled extrusions (P/N 6693). | Indoor |
|---|--------|--|---------|
| End Cap With Hole For 6693 45Deg Extrusion (Pack Of 10) | 6671-2 | End Caps With Hole For 45 Degree Extrusion (Pack Of 10) (P/N 6671-2) to support LED Tape installations that use forty-five degree angled extrusions (P/N 6693). | Indoor |
| Waterproof End Cap, 8mm W/2 Holes (Pack Of 10) | 6680 | Waterproof End Caps, 8mm with 2 Holes (Pack Of 10) (P/N 6680) to support outdoor LED Tape Installations. | Outdoor |
| Waterproof End Cap, 8mm W/No Holes (Pack Of 10) | 6682 | Waterproof End Caps, 8mm with No Holes (Pack Of 10) (P/N 6680) to support outdoor LED Tape Installations. | Outdoor |
| Waterproof End Cap, 12mm W/4 Holes (Pack Of 10) | 6684 | Waterproof End Caps, 12mm with 4 Holes (Pack Of 10) (P/N 6680) to support outdoor LED Tape Installations. | Outdoor |
| Waterproof End Cap, 12mm W/No Holes (Pack Of 10) | 6686 | Waterproof End Caps, 12mm with No Holes (Pack Of 10) (P/N 6680) to support outdoor LED Tape Installations. | Outdoor |
| Extrusions: | | | |
| Aluminum Extrusion, Low Profile, 2M | 6690 | The Aluminum Extrusion, Low Profile, 2m (P/N 6690) is best paired with our diffuser (P/N 6695). It is ideal for use with lower and medium power LED tapes, such as RGB, RGBA,RGBW, and RGBI. | Indoor |
| Aluminum Extrusion 45°, 2M | 6693 | The Aluminum Extrusion, 45°, 2m (P/N 6693) is best paired with our Diffuser, 2m (P/N 6694). It is ideal for use with LED tape for cove lighting, wall washes, and foot lighting. It works best for lower and medium power LED tape installations, such as RGB. | Indoor |

| Ribbon Cables: | | | | |
|----------------|--|---------|---|--------|
| 9 | Ribbon Cable, Six Conductor, 18 GA (Per Meter) | 6607 | Ribbon Cable, Six Conductor, 18 GA (Per Meter) (P/N 6607) are for joining and connecting five color LED tapes, such as QolorFLEX 5-in-1 LED Tape, and dimmers. | Indoor |
| 9 | Ribbon Cable, Six Conductor, 20 GA (Per Meter) | 6607-20 | Ribbon Cable, Six Conductor, 20 GA (Per Meter) (P/N 6607-20) are for joining and connecting five color LED tapes, such as QolorFLEX 5-in-1 LED Tape, and dimmers. This ribbon cable comes in 20 gauge (thinner than our standard 18-gauge model P/N 6607). | Indoor |
| 7 | Ribbon Cable, Five Conductor, 18 GA (Per Meter) | 6600 | Ribbon Cable, Five Conductor, 18 GA (Per Meter) (P/N 6600) are for joining and connecting four color LED tapes, such as QolorFLEX Quad Chip LED Tapes, and dimmers. | Indoor |
| | Ribbon Cable, Five Conductor, 20 GA (Per Meter) | 6600-20 | Ribbon Cable, Five Conductor, 20 GA (Per Meter) (P/N 6600-20) are for joining and connecting four color LED tapes, such as QolorFLEX Quad Chip LED Tapes, and dimmers. This ribbon cable comes in 20 gauge (thinner than our standard 18-gauge model P/N 6600). | Indoor |
| R | Ribbon Cable, Four Conductor, 18 GA (Per Meter) | 6608 | Ribbon Cable, Four Conductor, 18 GA (Per Meter) (P/N 6608) are for joining and connecting three color LED tapes, such as QolorFLEX RGB LED Tape, and dimmers. | Indoor |
| 7 | Ribbon Cable, Three Conductor, 18 GA (Per Meter) | 6606 | Ribbon Cable, Three Conductor, 18 GA (Per Meter) (P/N 6606) are for joining and connecting two color LED tapes and dimmers. | Indoor |
| 2 | Ribbon Cable, Two Conductor, 18 GA (Per Meter) | 6605 | Ribbon Cable, Two Conductor, 18 GA (Per Meter) (P/N 6605) are for joining and connecting single color LED tapes and dimmers. | Indoor |

Tape:



Tape, 3M VHB, 72 Yds

N/A single product page

6625

Indoor

Terminal Block Connectors:

| | Terminal Block Connector, Eight Pin, Male | 6614 | Terminal Block Connector, Eight Pin, Male (P/N 6614) is a mating extension terminal block connector for cable assemblies. This connector is designed for use with QolorFLEX 25x3A Dimmer (P/N 5811), and one is included with each QolorFLEX 25x3A Dimmer. | Indoor |
|--|--|------|--|--------|
| and a state of the | Terminal Block Connector, Six Pin, Female | 6613 | Terminal Block Connector, Six Pin, Female (P/N 6613) is a Terminal Block Connector, 6-Pin Female that is a mating output terminal block connector for cable assemblies. This connector is designed for use with QolorFLEX 25x3A Dimmer (P/N 5811). | Indoor |
| bititio | Terminal Block Connector, Six Pin, Male | 6612 | Terminal Block Connector, Six Pin, Male (P/N 6612) is a Terminal Block Connector, 6-Pin Male that is a mating extension terminal block connector for cable assemblies. | Indoor |
| coco co | Terminal Block Connector, Five Pin, Female | 6611 | Terminal Block Connector, Five Pin, Female (P/N 6611) is a Terminal Block Connector, 5-Pin Female that is used for making extension multi-conductor assemblies for LED Tape installations. | Indoor |
| POR OR | Terminal Block Connector, Five Pin, Male | 6610 | Terminal Block Connector, Five Pin, Male (P/N 6610) is a Terminal Block Connector, 5-Pin Male that is a mating extension terminal block connector for D4 LP dimmers. | Indoor |
| CA TO | Terminal Block Connector, Four Pin, Female | 5674 | Terminal Block Connector, Four Pin, Female (P/N 5674) is a Terminal Block Connector, 4-Pin Female that is a mating output terminal block connector for cable assemblies. | Indoor |
| Trans | Terminal Block Connector, Four Pin, Male | 5673 | Terminal Block Connector, Four Pin, Male (P/N 5673) is a Terminal Block Connector, 4-Pin Male that is a mating extension terminal block connector for cable assemblies. | Indoor |

| 01010 | Terminal Block Connector, Three Pin, Female | 5672 | Terminal Block Connector, Three Pin, Female (P/N 5672) is a Terminal Block Connector, 3-Pin Female that is a mating output terminal block connector for cable assemblies. | Indoor |
|-------|---|------|---|--------|
| *** | Terminal Block Connector, Three Pin, Male | 5671 | Terminal Block Connector, Three Pin, Male (P/N 5671) is a Terminal Block Connector, 3-Pin Male that is a mating extension terminal block connector for cable assemblies. | Indoor |
| | Terminal Block Connector, Two Pin, Female | 5658 | Terminal Block Connector, Two Pin, Female (P/N 5658) is a Terminal Block Connector, 2-Pin Female that is a mating output terminal block connector for cable assemblies. | Indoor |
| | Terminal Block Connector, Two Pin, Male | 5657 | Terminal Block Connector, Two Pin, Male (P/N 5657) is a Terminal Block Connector, 2-Pin Male that is a mating extension terminal block connector for cable assemblies. | Indoor |
| | Terminal Block Connector, 0-10V | 5669 | Terminal Block Connector, 0-10V (P/N 5669) are 1-10V output connections for QolorFLEX Dimmers. | Indoor |
| | Terminal Block Connector, 5 Position European (only), 8mm Pitch | 6618 | Five Position Euro Terminal Block, 8mm Pitch (P/N 6618) are useful terminal block connectors for cable assemblies for LED Tape installations. | Indoor |