

VIGNETTE CLOCK

DIN-MOUNT ASTRONOMICAL TIME-CLOCK



Models shown: 1. PWGW DIN CLK

WARRANTY

3-year limited warranty. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty>

NOTE

Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Using the SixEye cloud remote monitoring and management services, fire snapshots and zones remotely from any Internet-connected smart phone or computer.

OVERVIEW

Vignette™ Clock is a powerful expansion device for Vignette systems, allowing you to automate playback of snapshots, zones, and other Vignette functions based on date, time, or astronomical events such as dawn, dusk, sunrise or sunset.

Extensive configuration options in the free Pathscape software allow fine-tuning of the desired playback events. Set up schedules for each day, and select different looks for mornings, afternoons or evenings; on weekdays or weekends. Comprehensive scheduling for specific dates and date ranges.

Input the local timezone and geographical location for accurate astronomical event timing, without having to make any additional adjustments.

FEATURES

- Expands functionality of Vignette-based systems to automate playback of snapshots, zones, grandmaster level, and other Vignette functions
- Specify hour, minute, second, year, month, day of the week, or any range of these (contiguous or non-contiguous) to trigger snapshots and Vignette functions automatically
- Synchronize with astronomical events to trigger snapshots or functions at dawn, sunrise, dusk, or sunset, any day of the year
- Can subscribe to NTP (Network Time Protocol) server to keep time accurate
- Internal battery maintains clock accuracy during any power outages
- Can snapshot up to 4 Universes of SACN on its own and play back without any other Vignette wall stations
- Operates on Power-over-Ethernet (PoE) or auxiliary 24-48VDC input
- Requires free downloadable Pathscape software for configuration
- Mounts to standard 35mm DIN rail

ORDERING INFORMATION

PWGW		EXAMPLE: PWGW DIN CLK	
Series	Form Factor	Model	
PWGW Pathway Architectural Gateway	DIN DIN-mount	CLK	Vignette Clock (4.5")

Accessories

PWPWR DIN TERM 100W 48VDC	Power Supply, DIN-mount, Compression Fit Terminal, 100 Watts, 48 Volts DC
PWENC SHELF HOR	DIN System Enclosure, 2-RU Shelf unit with 2x16.5", Horizontal Rails
PWENC SML VER	DIN System Enclosure, Small 10" x 13" x 4.5", Vertical Rails
PWENC MED VER	DIN System Enclosure, Medium 10" x 23" x 4.5", Vertical Rails
PWENC SML HOR	DIN System Enclosure, Small 10" x 13" x 4.5", Horizontal Rails
PWENC MED HOR	DIN System Enclosure, Medium 10" x 23" x 4.5", Horizontal Rails
PWENC LRG VER	DIN System Enclosure, Large 18.5" x 31.5" x 6.25", Vertical Rails

SPECIFICATIONS

Electrical

Input Ratings PoE Class 1 device
24-48VDC auxiliary power input
4W maximum power consumption

Regulatory Compliance CE

Other Internal replaceable CR2032 backup battery (3V)

Mechanical

Dimensions 4.5" W x 4" H x 1.9" D (114mm W x 103mm H x 49mm D)

Weight 0.35 lbs (0.16 kg)

Environmental

Operating Temperature 14°F to 113°F (-10°C to 45°C)

Relative Humidity 5-95%, non-condensing

Standard Compliance RoHS 2011/65/EU + A1 2015/863


General

Compliance ANSI E1.31 sACN - Streaming ACN
IEEE 802.3af Power-over-Ethernet
California Title 1.81.26, Security of Connected Devices

PART NUMBER CROSS-REFERENCE

PREVIOUS		NEW
Part Number	Catalog Number	Description
0700-5481	PWGW DIN CLK	Architectural Gateway, DIN-mount, Vignette Clock (4.5")

DIMENSIONS

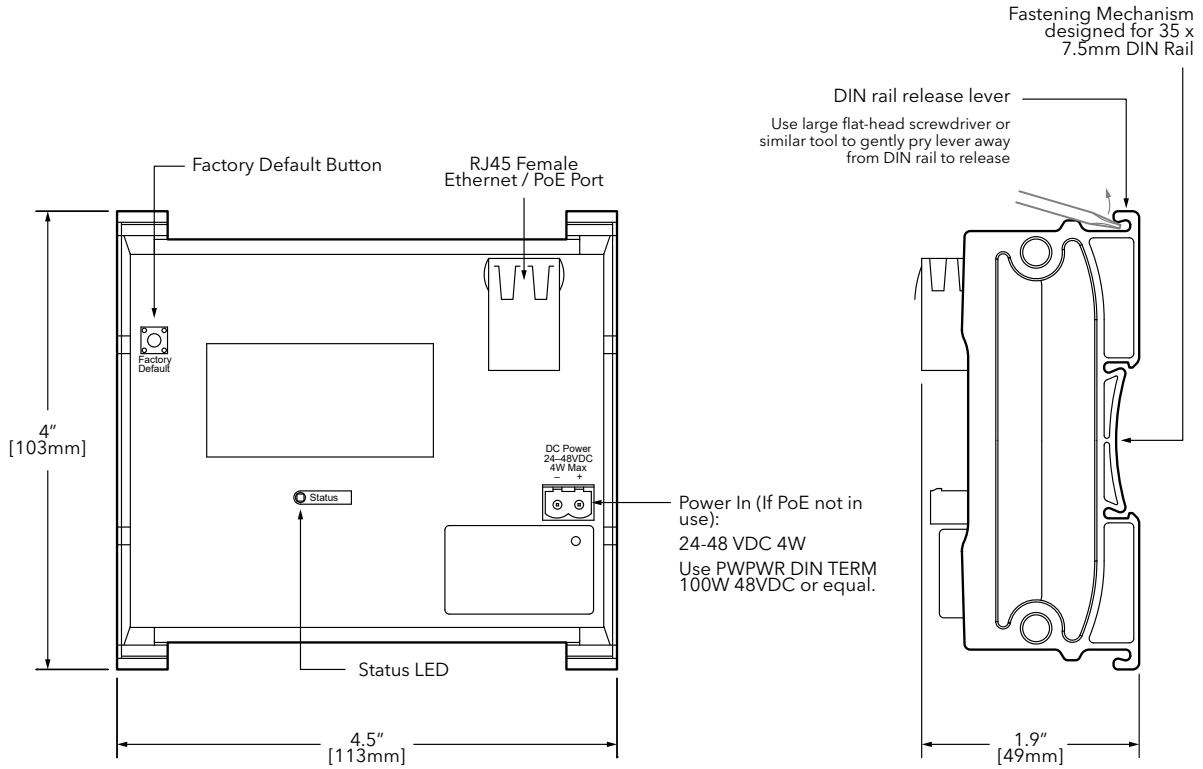

APPLICATION RISER

