

# CITY THEATRICAL

NEW YORK • LONDON

475 Barell Ave., Carlstadt, NJ 07072  
Voice: 800-230-9497, 201-549-1160  
Fax: 201-549-1161

## QolorPoint™ Mini Wireless Battery Powered LED Uplighter

**CTI Part #:** 7001 QolorPoint Mini Wireless Battery Powered LED Uplighter

City Theatrical's **QolorPoint Mini Wireless Battery Powered LED Uplighter** is a smaller companion of the well-established QolorPoint Wireless LED Uplighter. It may be the smaller product but it packs a powerful punch. Sufficient for lighting most areas up to two stories tall with no compromises in design, user-friendliness, durability, or quality. Each QolorPoint Mini is equipped with our award winning SHoW DMX Neo® radio and is rated for outdoor use (IP65). Its 1200 lumen output will light up small sized trees and is great for accenting architectural details. All QolorPoint Mini Battery Powered Wireless Uplighters can either operate wirelessly from a wireless DMX transmitter unit, or from a QolorPoint unit set to 'Master', or in stand-alone mode. All units in stand-alone mode can operate independently with built-in set colors or alternatively run their own internal routines.



### The QolorPoint Mini features include:

- Very fast setup and break-down for event lighting
- IP65 outdoor rated
- 1,200 lumen output: Will light two story buildings using two high brightness LED quad chips including White-
- Even color mixing and easy white pastel shades using four color Cree LEDs (RGB+W)
- Built-in City Theatrical SHoW DMX Neo wireless DMX transceiver
- Available 6-way charging flight case
- 700 recharges
- Stylish cylindrical shape
- Flicker free for TV and video applications
- Master or slave DMX selectable
- 4 or 5 Channel Control
- 60 built in LEE filter presets, 10 built in CC Filter presets
- 5 built in color fades (Rainbow 1, Rainbow 2, Snap, Warm, Cool)
- Operating temperature range -4 to +113 degF
- Lightweight


### Operation Modes

- DMX – Master/Slave settings, Address settings
- Effect – R'bow 1, R'bow 2, Snap, Warm, Cool, Test (Speed 1-10)
- Static – LEE and Color Correction Presets
- Custom – RGBW 0-255


## Settings

- Power Mode – Normal or LongLife
- Brightness Control – 0%-100% (Pre-Set Mode Intensity)
- 5th DMX Channel – On/Off (Channel 5 functions as intensity)
- PWM Freq 1.9kHz

## Measurements

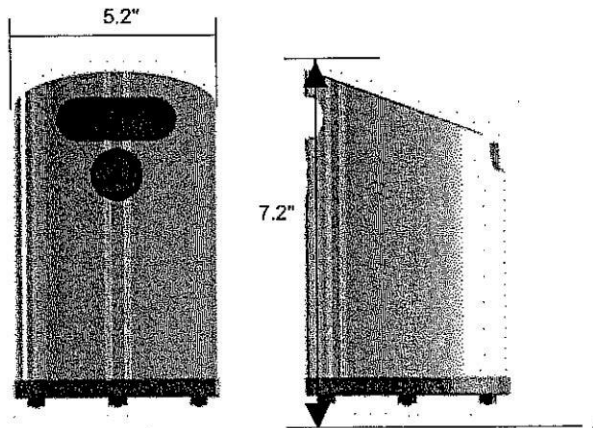

## Road Case

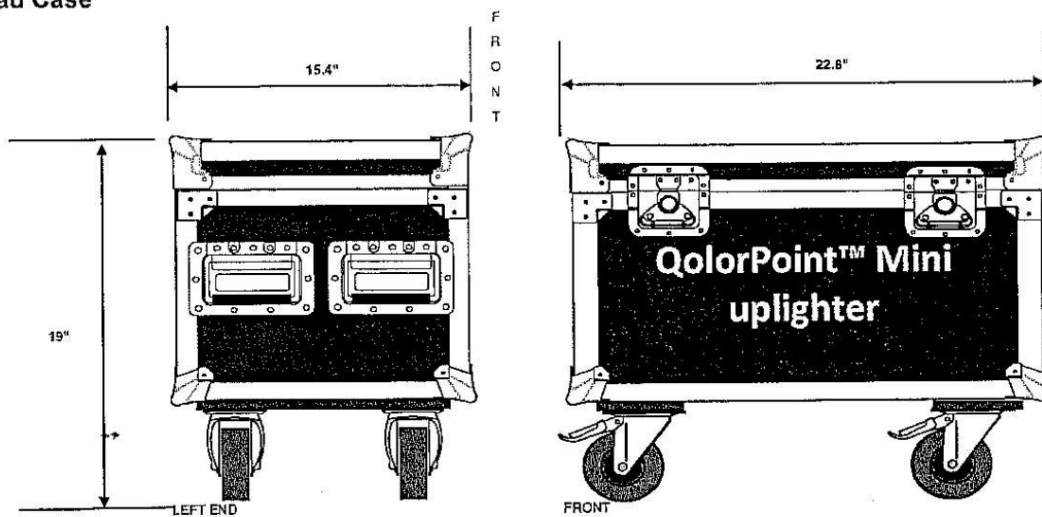

QolorPoint Mini and all QolorPoint products are available in Europe through White Light Ltd. [www.whitelight.ltd.uk](http://www.whitelight.ltd.uk)

Specifications subject to change